



**Aislante / Isolant / Insulation:** Poliuretano / Polyuréthane / Polyurethane

**Exterior / Extérieur / External:** Chapa de acero prelacada / Tôle d'acier prélaquée / Prepainted steel

**Interior / Intérieure / Internal:** Chapa de acero prelacada / Tôle d'acier prélaquée / Prepainted steel

**Espesor / Épaisseurs / Thickness(mm):**

|                   | 40    | 50    | 60    | 80    | 100   |
|-------------------|-------|-------|-------|-------|-------|
| <b>K W/m²K:</b>   | 0,575 | 0,460 | 0,383 | 0,288 | 0,230 |
| <b>K Kc/m²°C:</b> | 0,495 | 0,396 | 0,330 | 0,247 | 0,198 |
| <b>R m²K/W:</b>   | 1,739 | 2,174 | 2,000 | 3,478 | 4,348 |




Italpannelli se reserva el derecho a modificar el diseño y características de los paneles sin previo aviso.

Italpannelli se réserve le droit de modifier la conception et les caractéristiques des panneaux sans préavis.

Italpannelli reserves the right to modify the design and characteristics of the panels without prior notice.



ABACO DE PÉRDIDAS TÉRMICAS  
ABACO PERTE CHALEUR  
ABACO HEAT LOSS

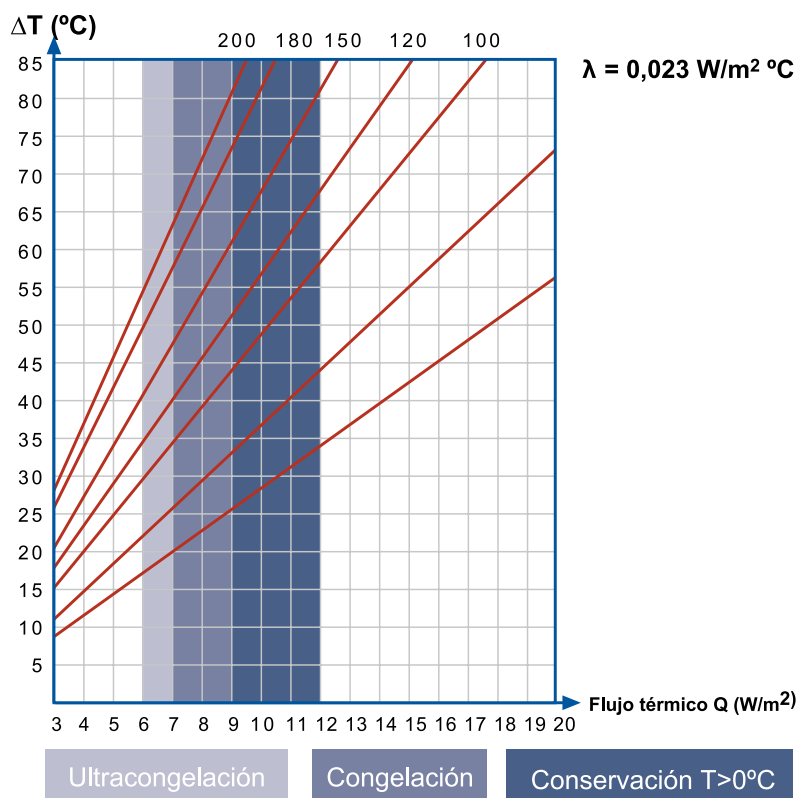

ESQUEMA ESTÁTICO 2 apoyos - Distancia entre apoyos: cm.  
SCHÉMA STATIC 2 supports - Distance entre les supports: cm.  
STATIC SCHEME 2 supports- Distance between supports: cm.

| Espesor del panel (mm) | 150 | 175 | 200 | 225 | 250 | 275 | 300 | 325 | 350 | 375 | 450 | 500 | 600 |
|------------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| 40                     | 254 | 216 | 188 | 166 | 148 | 134 | 122 | 98  | 77  | 55  | 30  | 19  | 7   |
| 60                     | 387 | 330 | 287 | 254 | 228 | 206 | 188 | 172 | 159 | 136 | 81  | 56  | 27  |
| 80                     | 519 | 443 | 386 | 342 | 307 | 278 | 254 | 233 | 159 | 195 | 153 | 107 | 57  |
| 100                    | 652 | 557 | 486 | 430 | 386 | 350 | 319 | 294 | 216 | 246 | 209 | 174 | 95  |

ESQUEMA ESTÁTICO +3 apoyos - Distancia entre apoyos: cm.  
SCHÉMA STATIC +3 supports - Distance entre les supports: cm.  
STATIC SCHEME +3 supports- Distance between supports: cm.

| Espesor del panel (mm) | 150 | 175 | 200 | 225 | 250 | 275 | 300 | 325 | 350 | 375 | 450 | 500 | 600 |
|------------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| 40                     | 254 | 216 | 188 | 166 | 148 | 134 | 122 | 98  | 77  | 55  | 30  | 19  | 7   |
| 60                     | 387 | 330 | 287 | 254 | 228 | 206 | 188 | 172 | 159 | 136 | 81  | 56  | 27  |
| 80                     | 519 | 443 | 386 | 342 | 307 | 278 | 254 | 233 | 159 | 195 | 153 | 107 | 57  |
| 100                    | 652 | 557 | 486 | 430 | 386 | 350 | 319 | 294 | 216 | 246 | 209 | 174 | 95  |